

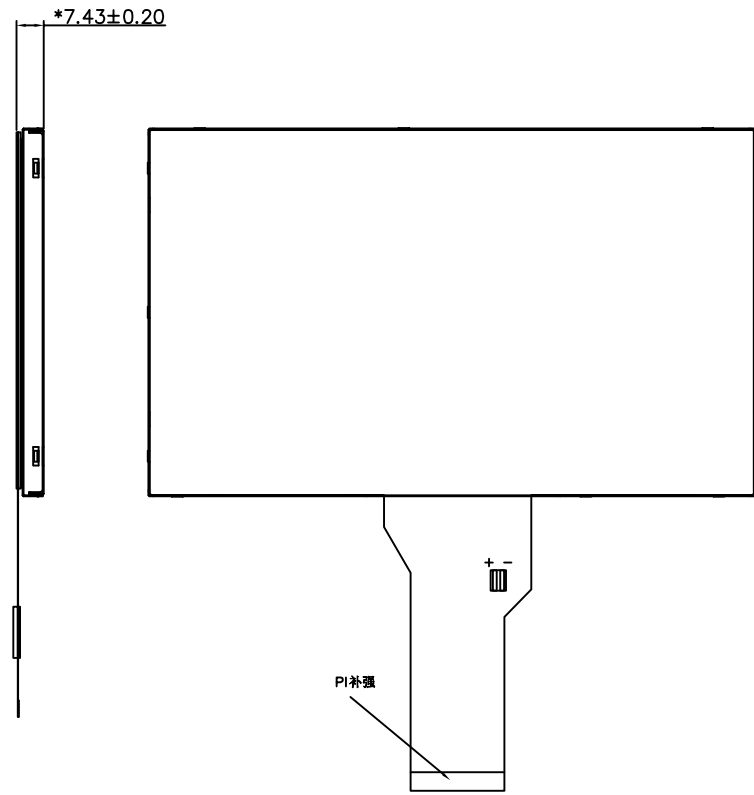


| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| 1.0 | First       | 2019.06.06 |

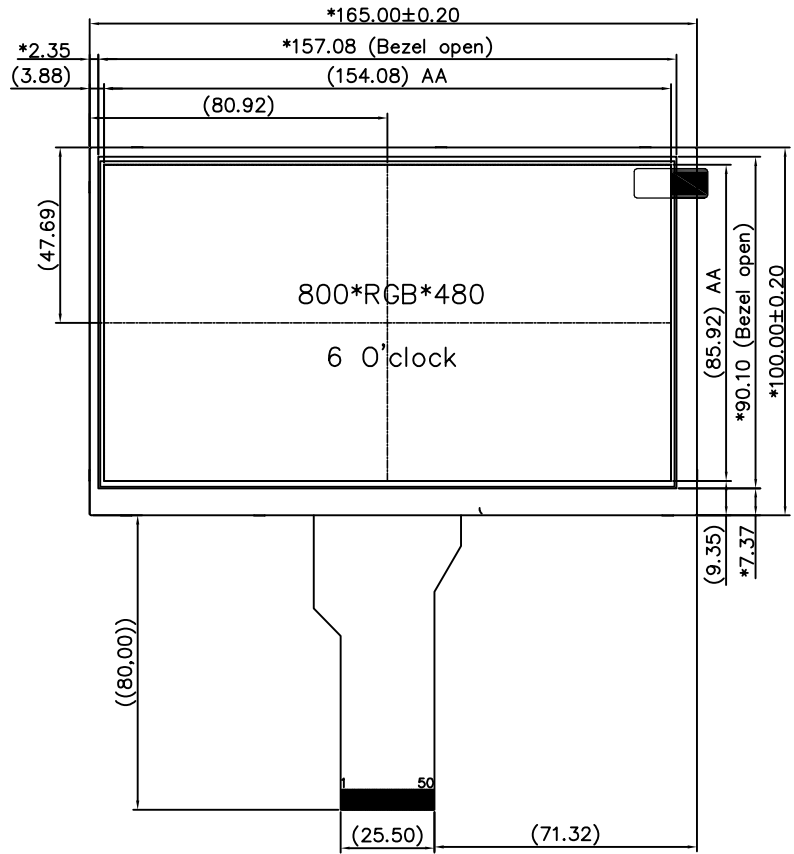

| PIN | NAME  | PIN | NAME  |
|-----|-------|-----|-------|
| 1   | VLED+ | 26  | G1    |
| 2   | VLED+ | 27  | GO    |
| 3   | VLED- | 28  | R7    |
| 4   | VLED- | 29  | R6    |
| 5   | GND   | 30  | R5    |
| 6   | VCOM  | 31  | R4    |
| 7   | DVDD  | 32  | R3    |
| 8   | MODE  | 33  | R2    |
| 9   | DE    | 34  | R1    |
| 10  | VS    | 35  | RO    |
| 11  | HS    | 36  | GND   |
| 12  | B7    | 37  | DCLK  |
| 13  | B6    | 38  | GND   |
| 14  | B5    | 39  | L/R   |
| 15  | B4    | 40  | U/D   |
| 16  | B3    | 41  | VGH   |
| 17  | B2    | 42  | VGL   |
| 18  | B1    | 43  | AVDD  |
| 19  | BO    | 44  | RESET |
| 20  | G7    | 45  | NC    |
| 21  | G6    | 46  | VCOM  |
| 22  | G5    | 47  | DITHB |
| 23  | G4    | 48  | GND   |
| 24  | G3    | 49  | NC    |
| 25  | G2    | 50  | NC    |

1. DISPLAY TYPE: 7.0" TFT-LCD
2. Viewing Angle : 6 O'clock
3. LCD Driver :
4. OPERATING TEMP: -20° C~70° C
5. STORAGE TEMP: -30° C~80° C
6. BACK LIGHT: 21 LEDs VF=9V IF=140mA
7. Module Brightness: Module:300cd/m(Typ)
8. GENERAL TOLERANCE: ±0.5



LED CIRCUIT DIAGRAM:

|                |        |                                                     |
|----------------|--------|-----------------------------------------------------|
| View: (视角)     |        | 深圳伟利登电子有限公司<br>Shenzhen Radiant Electronics Limited |
| Page: (页数)     | 1 OF 1 |                                                     |
| UNIT: (单位)     | mm     |                                                     |
| DESIGN: (设计)   | Jobin  | MODEL No. (产品型号): RT070TWVR116                      |
| CHECKED: (检查)  |        | CUSTOMER'S CODE(客户型号):                              |
| APPROVED: (核准) |        |                                                     |