

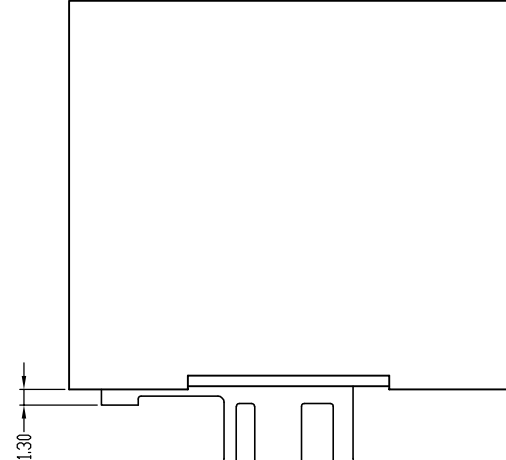
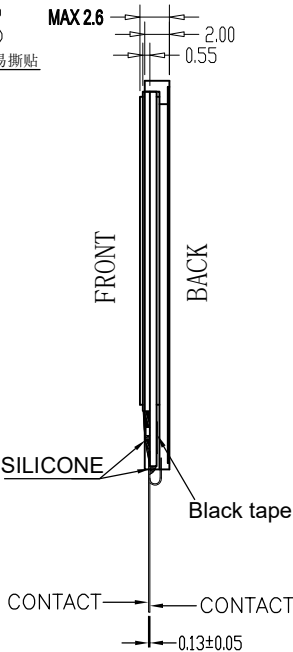
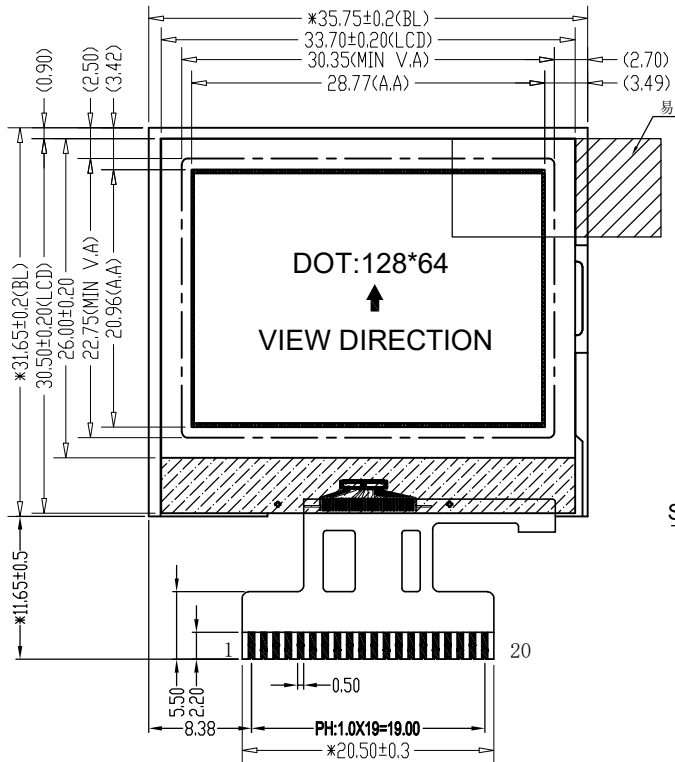



Signature: \_\_\_\_\_ Date: \_\_\_\_\_



PIN Description

PIN	SYMBOL
1	LEDK
2	LEDA
3	GND
4	VDD2.8V
5	VDD2.8V
6	NC
7	/CS
8	RST
9	C/D
10	/WR
11	/RD
12	DB7
13	DB6
14	DB5
15	DB4
16	DB3
17	DB2
18	DB1
19	DB0
20	GND



Specifications:

1. Display Mode: FSTN/Transmissive/Positive
2. Viewing Angle: 6 0'clock.
3. Drive Method: 1/65 Duty, 1/9 Bias, Vop=8.7V, Vdd=2.8V.
4. Top: -10°C~+60°C, Tst: -20°C~+70°C.
5. Connector: COG+FPC.
6. Drive IC: ST7567S
7. Backlight: 1PCS White LED, If=15mA&Vf=2.9V
8. With " \* " Mark Dimensions Are Important Dimensions.

# Shenzhen Radiant Electronics Limited

Unspecified Tolerance:	±0.2	UNITS: mm	DATE:	PART NUMBER :		SHEET:	1 of 1
DESIGN BY:		WZQ	2021.08.24	RC12864-1511		DRAWING DESCRIPTION:	MODEL
CHECKED BY:					DO NOT SCALE THIS DRAWING.	PROJECTION	
APPROVED BY:							