
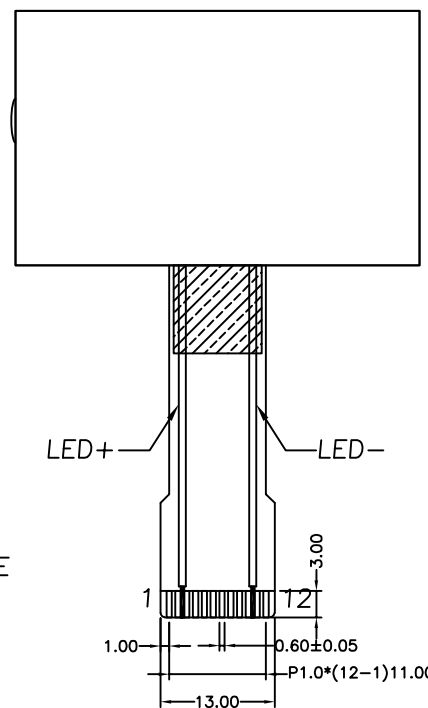
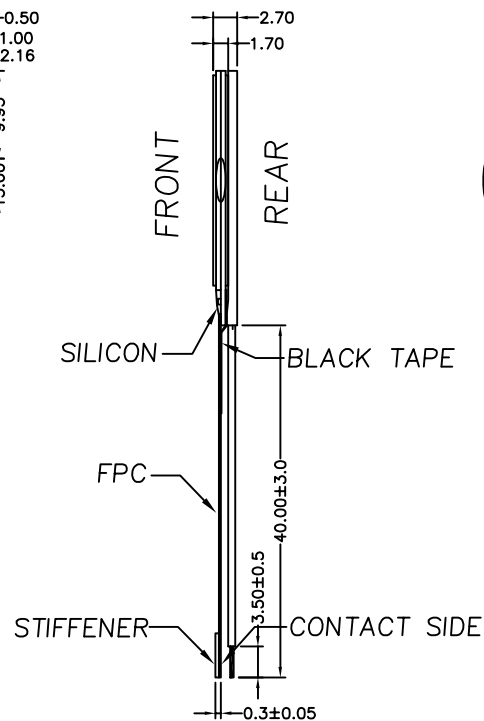



Signature: _____

Date: _____

REV.	DESCRIPTION	REVISOR	DATE
A0	New Release	Liu	2018-9-28
A1	Add BL	Liu	2020-11-11

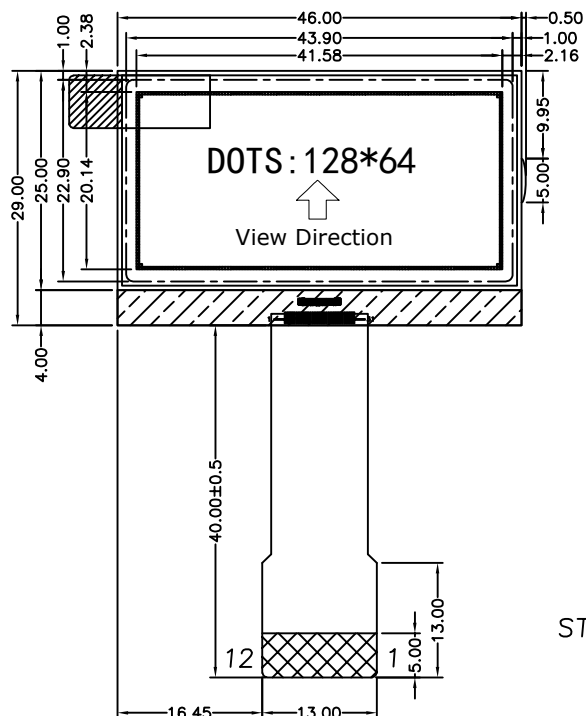

PIN	SYMBOL
1	CS0
2	RST
3	CD
4	SCL
5	SDA
6	VDD
7	VSS
8	VO
9	XV0
10	NC
11	NC
12	VG



Specifications:

1. Display Mode: DFSTN/Negative/Transmissive.
2. Viewing Angle: 6 O'clock.
3. Drive Method: 1/65Duty, 1/9Bias, $V_{lcd}=8.5\pm0.2V$, $VDD=3.0V$.
4. Backlight Type: White, 3.0V, 30mA, 2pcs.
5. Operating Temp: $-20^{\circ}C\sim+70^{\circ}C$.
6. Storage Temp: $-30^{\circ}C\sim+80^{\circ}C$.
7. Connector: COG+FPC
8. Drive IC: ST7567 (COG)
9. Customer P/N: --
10. Unmarked Tolerance: $\pm 0.2mm$
11. Requirements On Environmental Protection: RoHS

Shenzhen Radiant Electronics Limited

DESIGN BY:	NAME: Liu	DATE: 2020-11-14	MODEL NUMBER : RC12864-755		SHEET: 1 OF 1
CHECKED BY:			DEFAULT UNITS: mm		NAME: LCM
APPROVED BY:				PROJECTION	