
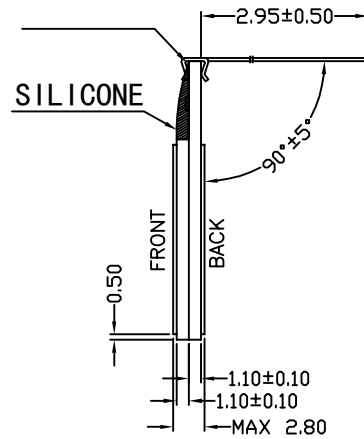


All Pages Of This Edition Approved



Signature: _____

Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	New Release	Liu	2021-5-27

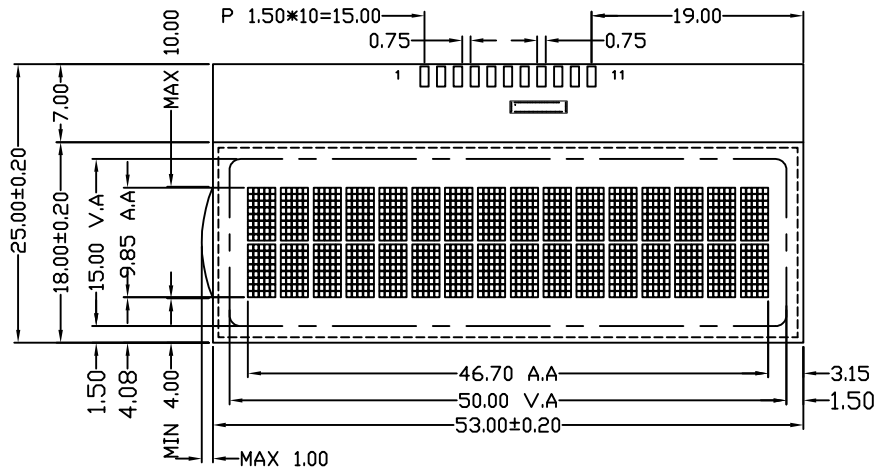


PIN	COM1
1	NC
2	NC
3	NC
4	XRESET
5	SCL
6	SDA
7	VSS
8	VDD
9	VOUT
10	NC
11	NC



Specifications:

1. Display Mode: FSTN/Positive/Reflective.
2. Viewing Angle: 6 O'clock.
3. Drive Method: 1/17Duty, 1/5Bias, VLCD=4.5±0.2V, VDD=3.3V.
4. Backlight Type: --.
5. Operating Temp: -10°C~+50°C.
6. Storage Temp: -20°C~+60°C.
7. Connector: COG+FPC
8. Drive IC: ST7032i(COG)
9. Customer P/N: --
10. Unmarked Tolerance: ±0.2mm
11. Requirements On Environmental Protection: RoHS

Shenzhen Radiant Electronics Limited

DESIGN BY:	NAME:	DATE:	MODEL NUMBER :		SHEET:	1 OF 1
CHECKED BY:	Liu	2021-5-27	RC1602-97		NAME:	LCM
APPROVED BY:			DEFAULT UNITS: mm	PROJECTION		