

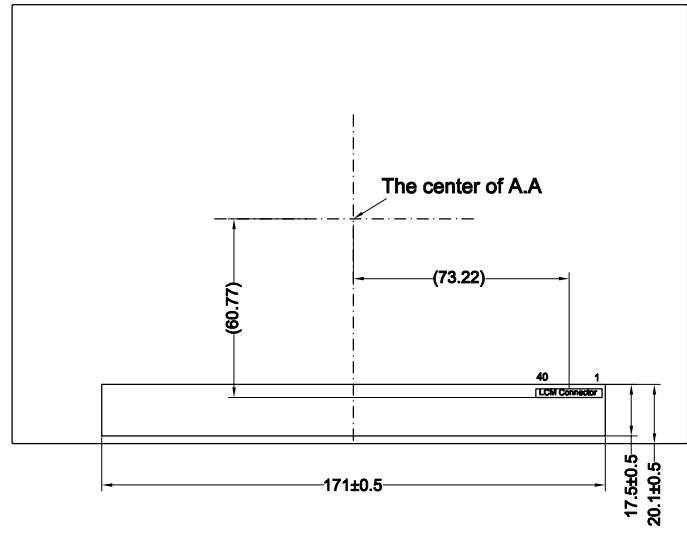


REV	DESCRIPTION	DATE
1.0	First	2020.09.22

NO.	Pin name
1	VCOM
2	VDD
3	VDD
4	NC
5	NC
6	NC
7	GND
8	RXINO-
9	RXINO+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	LED_PWM
28	NC
29	AVDD
30	GND
31	LED-
32	LED-
33	NC
34	NC
35	VGL
36	NC
37	CABC_EN
38	VGH
39	LED+
40	LED+

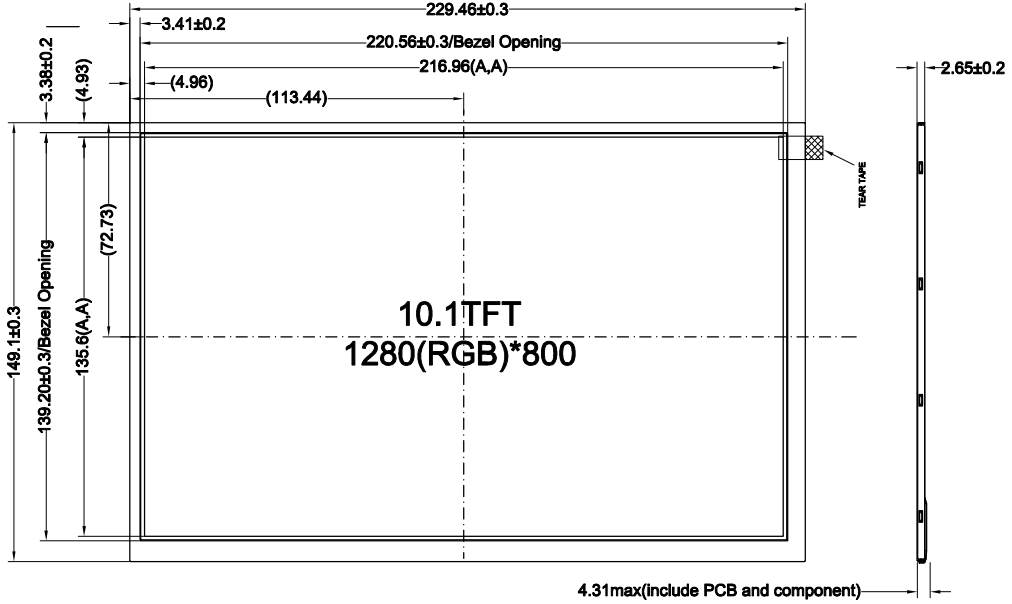

- NOTES:
1. Display type: 10.1" TFT
 2. Viewing direction: Full viewing
 3. Polarizer mode: Transmissive/normal black
 4. Operation temperature: -20° C ~ +70° C
 5. Storage temperature: -30° C ~ +80° C
 6. Power supply voltage: 3.3V
 7. Backlight: White (39LED) / Vf=9V (TYP.) If=260mA
 8. Luminance: 300 (typ.) cd/m²
 9. Board Connector : F62240-H1210A or equivalent
 10. ROHS must be complied
- * Unspecification tolerance are ±0.3mm

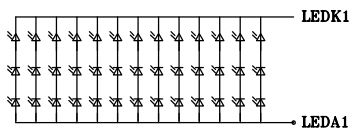

View: (层数)		深圳伟利登电子有限公司 Shenzhen Radiant Electronics Limited
Page: (页数)	1 OF 1	
UNIT: (单位)	mm	MODEL No. (产品型号): RT101IWXL110-N39 CUSTOMER'S CODE (客户型号):
DESIGN: (设计)	Jobin	
CHECKED: (检查)		
APPROVED: (核准)		