

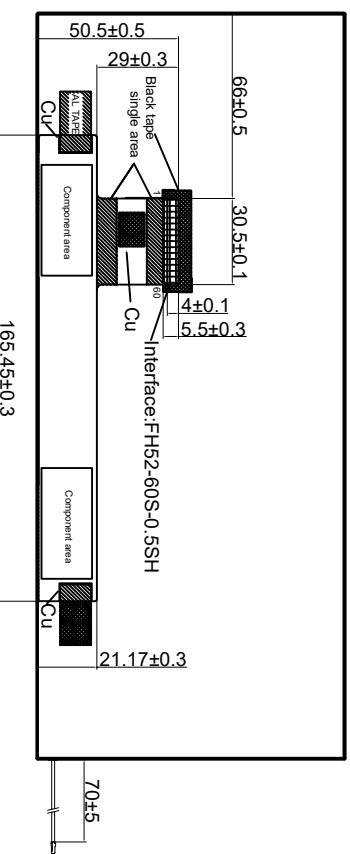



REV	DESCRIPTION	DATE
1.0	First	2016.11.22
2.0		

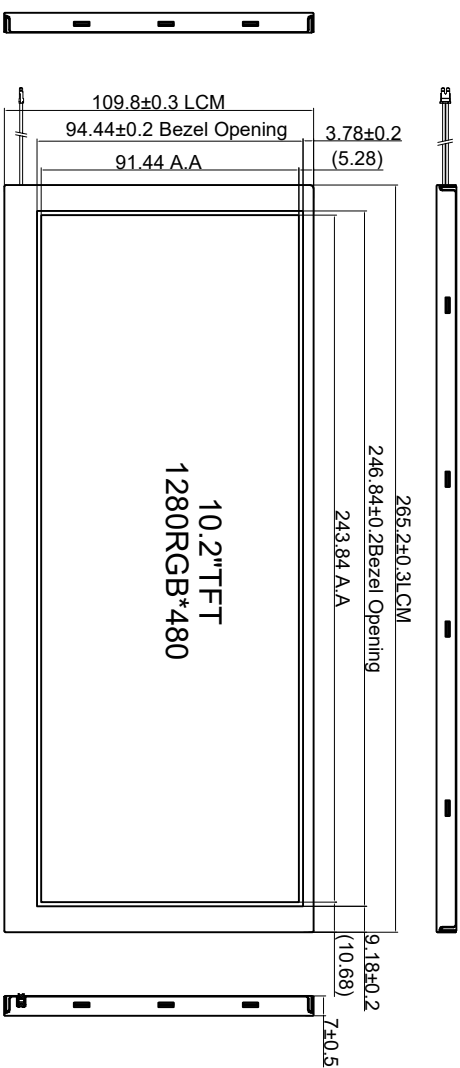

NO.	PIN NAME
1	AGND
2	AVDD
3	DVDD
4	GND
5	NC
6	DVDD
7	GND
8	V14
9	V13
10	V12
11	V11
12	V10
13	V9
14	V8
15	GND
16	DVDD1/VDS
17	GND3
18	NIND3
19	NIND3
20	GND
21	NC
22	NC
23	GND
24	PIND2
25	NIND2
26	GND
27	PIND1
28	NIND1
29	GND
30	PIND0
31	NIND0
32	GND
33	GND1/VDS
34	GRB
35	STRYB
36	SHLR
37	DVDD
38	UPDN
39	AGND
40	AVDD
41	NC
42	NC
43	GND
44	DVDD
45	GND
46	V7
47	V6
48	V5
49	V4
50	V3
51	V2
52	V1
53	GND
54	DVDD
55	SEL/INC1
56	VGH
57	DVDD
58	VGL
59	GND
60	BIST

- NOTES:**
1. Display size: 10.2" TFT
  2. Viewing direction: FULL VIEW
  3. Display mode: Transmissive/Normal Black/Anti-glare
  4. Operation temperature: -30°C~+85°C
  5. Storage temperature: -40°C~+95°C
  6. Power supply voltage: 3.3V
  7. Backlight: White(24 LED)/24V/60mA
  8. Brightness: 600(TYP)cd/m<sup>2</sup>
  9. ROHS must be complied
- \* Unspecification tolerance are ±0.3mm



View: (视图)		深圳伟利登电子有限公司
Page: (页数)	1 OF 1	Shenzhen Radiant Electronics Limited
UNIT: (单位)	mm	
DESIGN: (设计)	Jobin	
CHECKED: (检查)		
APPROVED: (核准)		MODEL No. (产品型号): RT1021WXL101
		CUSTOMER'S CODE (客户型号):

1 2 3 4 5 6