



REV	DESCRIPTION	DATE
1.0	First	2020.07.02
2.0		

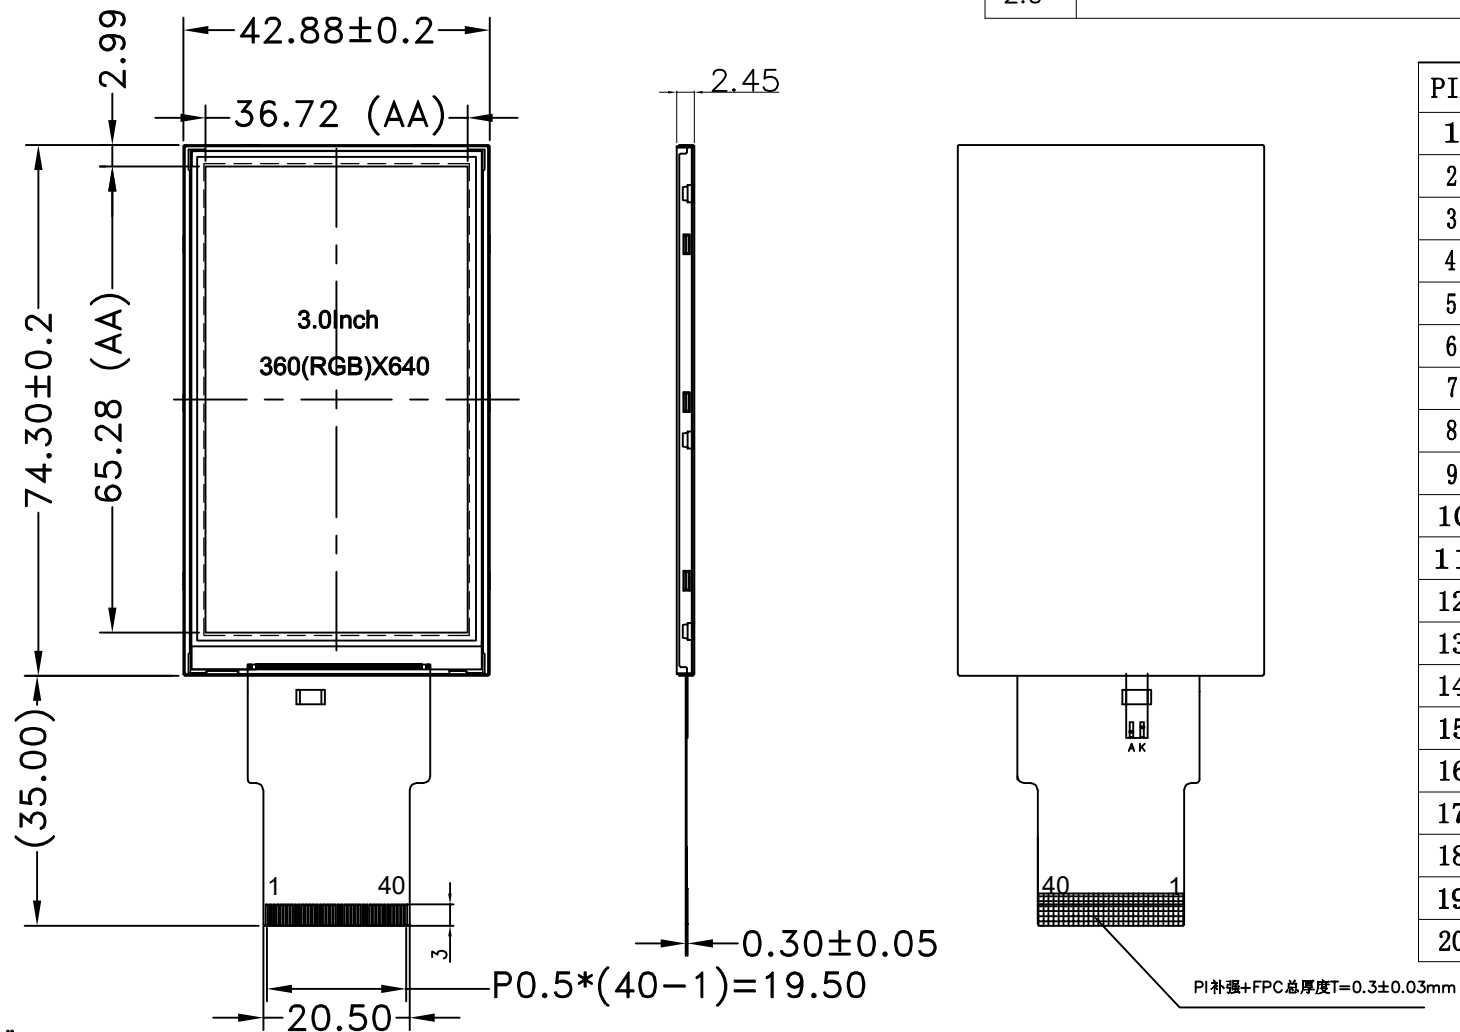

PIN	NAME	PIN	NAME
1	LEDK	21	B0
2	LEDA	22	B1
3	GND	23	B2
4	VDD	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	CLK
11	R6	31	NC
12	R7	32	HS
13	G0	33	VS
14	G1	34	DE
15	G2	35	NC
16	G3	36	GND
17	G4	37	RESET
18	G5	38	SDA
19	G6	39	SCL
20	G7	40	CS

1. DISPLAY TYPE: 3.0" TFT-LCD
2. Viewing Angle : ALL'clock
3. LCD Driver : ST7701S
4. OPERATING TEMP: -20° C~70° C
5. STORAGE TEMP: -30° C~80° C
6. BACK LIGHT Uniformity:80%(Min) VF:18.0V(Typ) IF:40mA(Fix)
7. Module Brightness: 500cd/m(Min)
8. GENERAL TOLERANCE: ±0.5



View: (视角)		深圳伟利登电子有限公司 Shenzhen Radiant Electronics Limited
Page: (页数)	1 OF 1	
UNIT: (单位)	mm	PCHY MODEL No. (我司型号): RT030IVGR118 CUSTOMER'S CODE (客户型号):
DESIGN: (设计)	Jobin	
CHECKED: (检查)		
APPROVED: (核准)		