



REV	DESCRIPTION	DATE
1.0	First	2020.10.22
2.0		

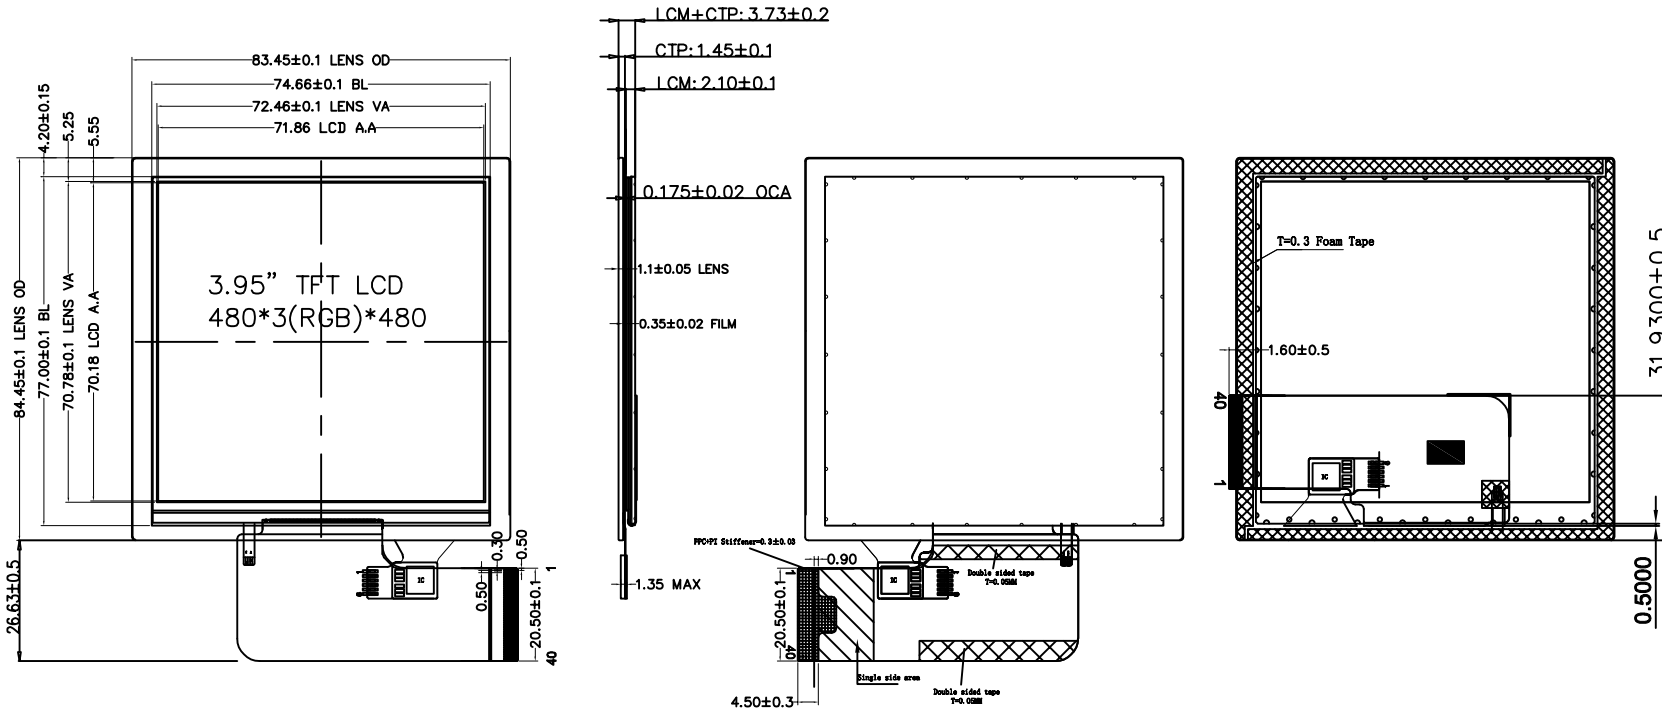

PIN	NAME	PIN	NAME
1	LEDA	21	DB5
2	LEDK	22	DB6
3	LEDK	23	DB7
4	GND	24	DB8
5	VCI/3.3V	25	DB9
6	RESET	26	DB10
7	NC	27	DB11
8	NC	28	DB12
9	SDA	29	DB13
10	SCK	30	DB14
11	CS	31	DB15
12	PCLK	32	DB16
13	DE	33	DB17
14	VSYN	34	GND
15	HSYN	35	TP/INT
16	DB0	36	TP/SDA
17	DB1	37	TP/SCL
18	DB2	38	TP/RST
19	DB3	39	TP/VCC
20	DB4	40	GND

1. DISPLAY TYPE: 3.95" WVGA TFT-LCD
2. Viewing Angle : ALL'clock
3. LCD Driver : ST7701S
4. OPERATING TEMP: -20° C~70° C
5. STORAGE TEMP: -30° C~80° C
6. BACK LIGHT Uniformity:75%(Min) VF:15.2V(Typ) IF:40mA(Fix)
7. Module Brightness: Module:300cd/m(Typ)
8. GENERAL TOLERANCE: ±0.2



5*3=15EA If=40mA

LED CIRCUIT DIAGRAM:

View: (视角)		深圳伟利登电子有限公司 Shenzhen Radiant Electronics Limited
Page: (页数)	1 OF 1	
UNIT: (单位)	mm	
DESIGN: (设计)	Jobin	PCHY MODEL No. (我司型号): RT040IVGR124C
CHECKED: (检查)		CUSTOMER'S CODE(客户型号):
APPROVED: (核准)		客户确认:

1

2

3

4

5

6