



REV	DESCRIPTION	DATE
1.0	First	19.06.06
2.0		

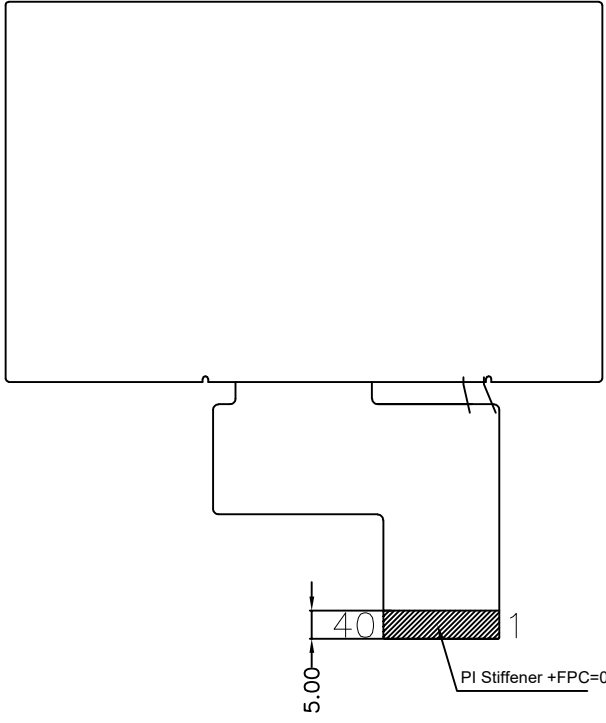

PIN	NAME	PIN	NAME
1	LEDK	21	B0
2	LEDA+24V	22	B1
3	GND	23	B2
4	VDD/3.3V	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	CLK
11	R6	31	NC
12	R7	32	HS
13	G0	33	VS
14	G1	34	DE
15	G2	35	NC
16	G3	36	GND
17	G4	37	X1
18	G5	38	Y1
19	G6	39	X2
20	G7	40	Y2

1. DISPLAY TYPE: 4.3" WGA TFT-LCD
2. Viewing Angle : ALL'clock
3. LCD Driver : HX8264+HX8664
4. OPERATING TEMP: -20° C~70° C
5. STORAGE TEMP: -30° C~80° C
6. BACK LIGHT Uniformity: 75%(Min) VF: 24. 2V(Typ) IF: 40mA(Fix)
7. Module Brightness: Module: 900cd/m(Min) , 1000cd/m(Typ)
8. GENERAL TOLERANCE: ±0.5

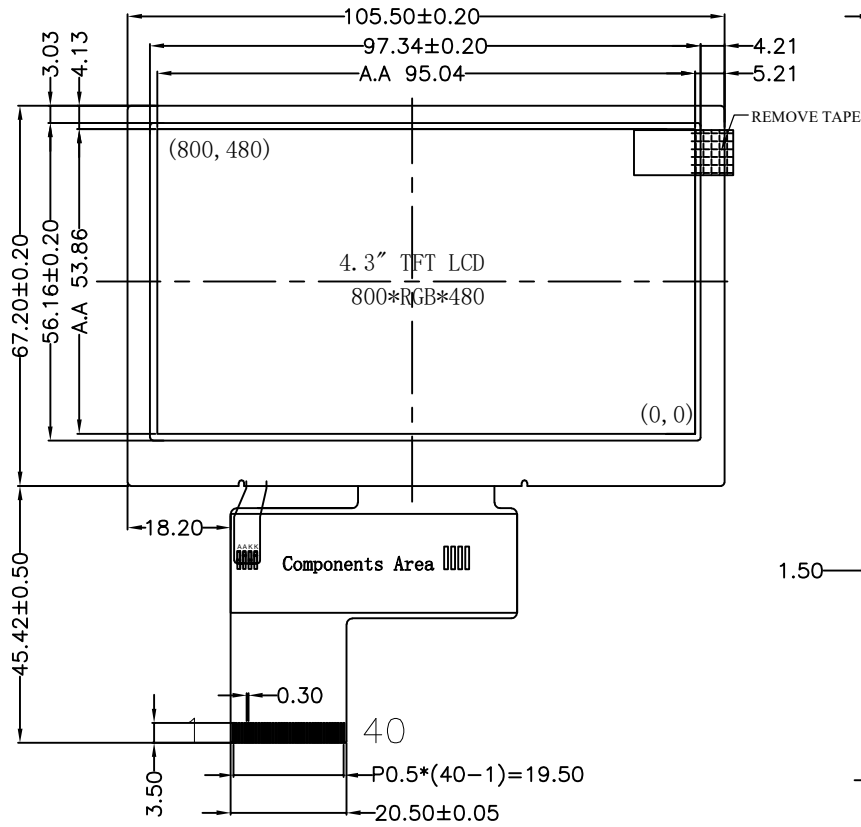

8*3=24EA If=40mA

LED CIRCUIT DIAGRAM:

View: (视角)		深圳伟利登电子有限公司 Shenzhen Radiant Electronics Limited
Page: (页数)	1 OF 1	
UNIT: (单位)	mm	MODEL No. (产品型号): RT043IWVR120 CUSTOMER'S CODE (客户型号): 客户确认:
DESIGN: (设计)	Jobin	
CHECKED: (检查)		
APPROVED: (核准)		