
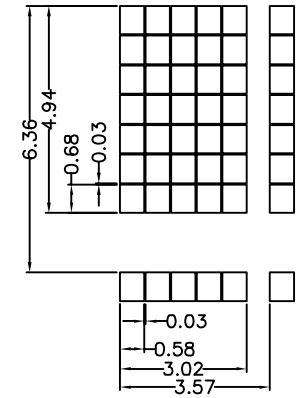



INTERFACE	
1	XRESET
2	RS
3	CSB
4	SCL
5	SDA
6	VSS
7	VDD
8	VOUT
9	CAP1P
10	CAP1N

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2020/03/07
01	管脚长度改为8mm	2020/08/13

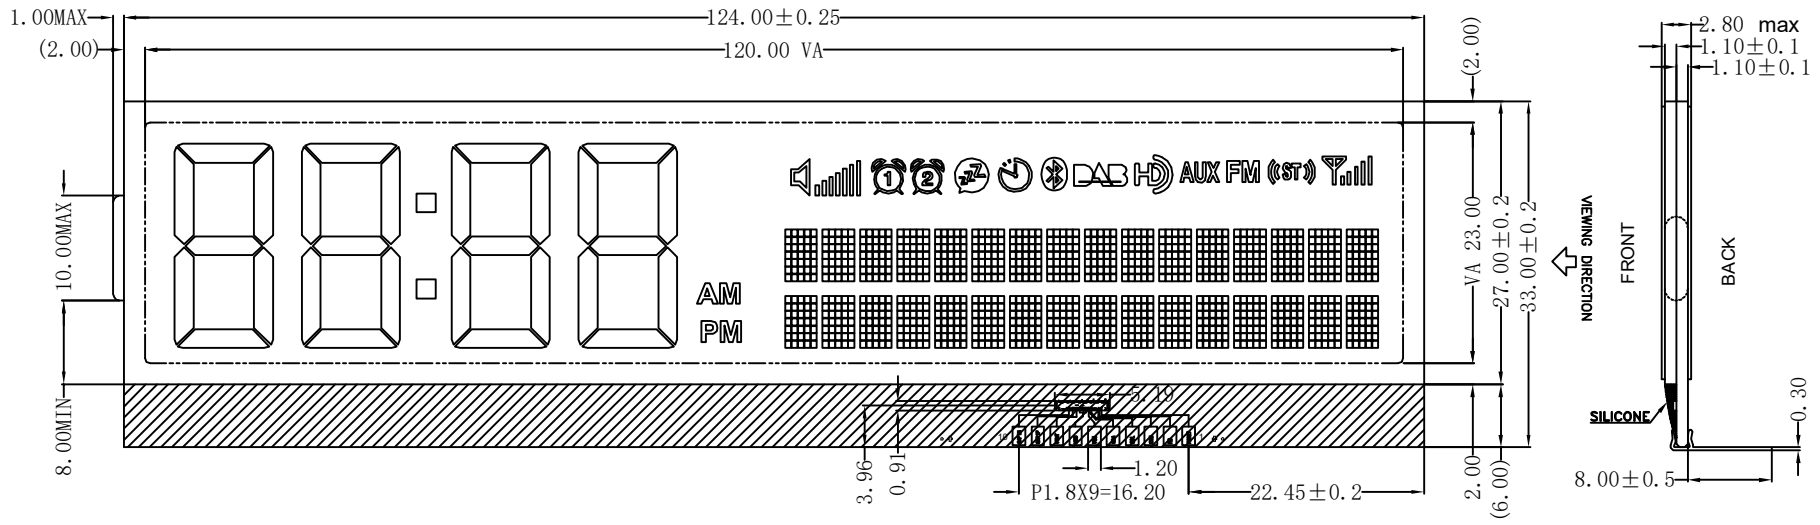


DOTS SIZE

Specifications:

1. Display Mode: DFSTN/Negative/Transmissive
2. Viewing Angle: 30°
3. Drive Method: 1/17 Duty, 1/5 Bias, Vop=6.4V, Vdd=3.3V.
4. Top: -0°C~+50°C, Tst: -10°C~+60°C.
5. Connector: COG+PIN.
6. Drive IC: ST7036i
7. BACKLIGHT: ----
8. Rohs Compliant

Shenzhen Radiant Electronics Limited

Unspecified Tolerance: ±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY: WZQ	2020/03/07	RC1602-79	DATE:		2020/03/07	
CHECKED BY:			DO NOT SCALE THIS DRAWING.	PROJECTION		
CUSTOM NO:						